

August 21, 2019

Subject: IFB #1714-B: Resurface McDonough and Ramah Road-Addendum 1

Gentlemen/Ladies:

Below, please find responses to questions, clarification, or additional information for the above referenced Invitation for Bid. You will need to consider this information when preparing your proposal.

1. What will be the allowed work hours on these roads?

On both roads the hours are 7 am to 6 pm. The County is open to consider a second option for Ramah Road if requested by the Contractor to do the work during the night 7pm to 6am and fully close the road to traffic in-place of working during the normal day hours. This request needs to be listed under the exception to specifications page in the bid package.

2. It is assumed that the 9.5mm TP1 Leveling is on McDonough Rd.. Will this be Spot Leveling or Full Width Leveling? Can the square yards of Leveling be provided?

This will be spot leveling only where it is needed throughout both projects at the request of the contractor and approval of the County.

3. How will the unpaved driveways be handled?

All unpaved driveways will be tied in at minimum of 2' and a maximum of 4'

4. Will the contractor be required to post mount the Advanced Warning Signs or can the signs be placed on tripods?

Tripods will be acceptable only if each street can be completed within one week. County will place at least one message board on each of the projects

5. Will the contractor be required to use a MTV (Shuttle Buggy) when placing the 12.5mm asphalt mix?

MTV is encouraged but not required.

6. It is identified that the turn lanes on Ramah Rd. will be milled and paved at 1.5", but how about the turn lanes on McDonough Rd.?

All turn lanes will need to be edge milled to tie-in flush with the existing curb and gutter elevation.

7. It looks like the contractor will be required to pave into the driveways 4' and into the side roads 20'. Is this correct?

Yes.

8. Will the contractor be required to supply any asphalt compaction test for this project?

No the County will hire a second party to do asphalt compaction test.

9. Please clarify the Grading Per Mile item. The quantity looks to be understated. McDonough Rd. is 2.20 miles in length x (2) shoulders = max. 4.40 shoulder miles and if you subtract out the curb and gutter sections of the turn lanes the total will be +/- 3.97 shoulder miles.

Grading Per Mile will be changed on the bid sheet to reflect 4.29 mile (3.97 on McDonough and .32 miles on Ramah).

10. The Bitum Tack Coat quantity looks to be overstated. Please clarify the stated quantity.

Thank you the bid sheet will be changed to reflect the new value of 3508 Gallons. A new updated pricing sheet is attached. Please use this sheet when you respond.

11. A form titled "List of Subcontractors" is added to the Invitation to Bid by inclusion in this Addendum (attached). This list shall be completed and submitted to the county within 24 hours of issuance of the Notice to Proceed

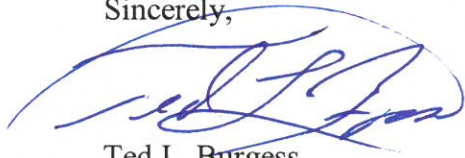
Received by _____ Company _____

Note: Please sign and return this addendum with your submitted quote. Any responder not returning a signed addendum will still be responsible for compliance with any requirements, specifications, or changes contained in the addendum.

Questions will be received until 3 PM Thursday, August 29, 2019. The received by date for this Invitation to Bid has not been changed. **Bids will be accepted until 3:00pm, Thursday, September 5, 2019.**

Thank you for your attention to this matter.

Sincerely,

A handwritten signature in blue ink, appearing to read 'Ted L. Burgess', is written over a faint, circular watermark or stamp.

Ted L. Burgess
Director of Purchasing

TLB/tc

IFB#1714-B: Resurface McDonough Ramah Roads - Updated Pricing Sheet

Item	Description	Unit	Est Qty	Unit Price	Extended Price
150-1000	Traffic Control	Lump Sum	1		
210-0200	Grading per mile	Mile	4.29		
402-3101	9.5mm Type 1 (Leveling)	Ton	390		
402-3130	12.5mm	Ton	3,746		
402-3190	19mm	Ton	415		
413-0750	Bitum Tack Coat	Gallon	3,508		
432-5010	Mill Asph Conc Pmnt, Variable Depth	Sq Yd	7,611		
653-1704	Themo Solid Traf Stripe 24", White	Linear Ft	108		
653-1501	Themo Solid Traf Stripe 5", White	Linear Ft	26,643		
653-1502	Themo Solid Traf Stripe 5", Yellow	Linear Ft	25,860		
653-3501	Thermo Skip Traf Stripe 5", White	GLF	610		
653-6004	Thermo SY White	Sq Yd	791		
653-6006	Thermo SY Yellow	Sq Yd	369		
653-0110	Thermo Arrow Type 1	Each	30		
653-0120	Thermo Arrow Type 2	Each	8		
653-0130	Thermo Arrow Type 3	Each	2		
654-1001	Raised Pvmnt Markers, Tp 1	Each	680		
700-6910	Permanent Grassing	Acre	1.24		
TOTAL BID PRICE:					

