

September 16, 2020

**Subject: ITB #1844-B: Redwine Road & Starrs Mill School Complex Multi-Use Path
Addendum #4**

Gentlemen/Ladies:

Below, please find responses to questions, clarification, or additional information for the above referenced Invitation to Bid. You will need to consider this information when preparing your bid.

1. The Project Pricing Sheet has been updated and is attached. It is important that you discard previous pricing sheets and use only this one.
2. Are we to price Tapping sleeve and Valves or Inserta Valves? There is a big price difference between the two and I do not understand the purpose of the Tapping sleeves and valves. They will not stop the flow of the main to perform the relocates of the main under the storm pipe.

Thank you for identifying this issue. After discussion with the Water System, Fayette County has revised the Price Sheet with the following changes:

Replace (Quantity)	With (Quantity)
670-3087 Tapping Sleeve & Assembly 8 in x 8 in (1)	660-1925 MJ Gate Valve 8-in (1)
670 3129 Tapping Sleeve & Assembly 12 in x 12 in (2)	660-1935 MJ Gate Valve 12-in (2)

All MJ fittings, including the MJ solid sleeves, shall be restrained with Uni-Flange restraint glands (or approved equal). The cost for the restraint glands shall be included in the unit prices for the gate valves. The Contractor shall provide submittals to the Water System for review and approval prior to construction.

The Water System will allow a short-term outage along a portion of the Redwine Road line. The existing network of supply lines should allow the work to be performed without impact to homes in the adjacent subdivisions.

The bid due date and time have not been changed. The bids are due **on or before 12:00 p.m., Thursday, September 24, 2020** in the Purchasing Department, Suite 204. For bids that you may drop off in person, there will be a large metal parcel drop box located outside

the front door of the Purchasing Department, Suite 204, in the county complex at 140 Stonewall Avenue West, Fayetteville, Georgia. You must place your bid in the drop box no later than 12:00 p.m. on Thursday, September 24, 2020. Bids must be signed to be considered. Late bids cannot be considered. Faxed bids or emailed bids cannot be considered. A virtual bid opening will be held at 3:00 p.m. on that day.

You may view the virtual bid opening here:

<https://livestream.com/accounts/4819394?query=fayette%20county&cat=account>


Received by (Name): _____ Company _____

Note: If this addendum is not returned to the Fayette County Purchasing Department or if it is returned not signed, responding individuals, companies or other organizations will still be responsible for the requirements of this addendum and the specifications or changes herein.

The deadline for inquiries has passed, so the Purchasing Department will not be able to accept any additional questions at this time.

If you have questions, please contact Natasha Duggan, Contract Administrator at (770) 305-5150 fax (770) 719-5534 or email at nduggan@fayettecountyga.gov.

Sincerely,

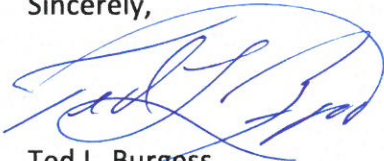

Ted L. Burgess
Director of Purchasing

Bidder: _____

ATTACHMENT TO ADDENDUM 4

Project Number: 0012624		Fayette County Project Pricing Sheet		Revised: 8-28-20 9-16-20	
Redwine Road & Starrs Mill School Complex Multi-Use Path					
Pay Item #	Item Description	Qty.	Unit	Unit Price	Total
Roadway					
150-1000	TRAFFIC CONTROL -	1	LS		
156-0100	GPS DATA COLLECTION AND SUBMITTAL	1	LS		
210-0100	GRADING COMPLETE-	1	LS		
441-0108	CONC SIDEWALK, 8 IN	240	SY		
441-5004	CONCRETE HEADER CURB, 10 IN, TP 4	540	LF		
515-2020	GALV STEEL PIPE HANDRAIL, 2 IN, ROUND	1225	LF		
441-3999	CONCRETE V GUTTER	1100	LF		
441-6216	CONC CURB & GUTTER, 8 IN X 24 IN, TP 2	152	LF		
610-0300	REM FENCE -	1153	LF		
611-4890	RESET FENCE -	593	LF		
634-1200	RIGHT OF WAY MARKERS	14	EA		
643-8405	FENCE, SPECIAL DESIGN	524	LF		
Pavement					
310-1101	GR AGGR BASE CRS, INCL MATL	2282	TN		
402-3100	RECYCLED ASPH CONC 9.5 MM SUPERPAVE, TYPE I, GP 1 OR BLEND 1, INCL BITUM MATL & H LIME	955	TN		
402-3113	RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	4	TN		
500-3200	CLASS B CONCRETE	26	CY		
Sub Total					
Drainage					
441-0301	CONC SPILLWAY, TP 1	1	EA		
500-3002	CLASS AA CONCRETE	16	CY		
511-1000	BAR REINF STEEL	2721	LB		
550-2180	SIDE DRAIN PIPE, 18 IN, H, 1-10	2848	LF		
550-2300	SIDE DRAIN PIPE, 30 IN, H, 1-10	521	LF		
550-1180	STORM DRAIN PIPE, 18 IN, H, 1-10	180	LF		
550-1240	STORM DRAIN PIPE, 24 IN, H, 1-10	13	LF		
550-1300	STORM DRAIN PIPE, 30 IN, H, 1-10	8	LF		
550-1540	STORM DRAIN PIPE, 54 IN, H, 1-10	14	LF		
550-3518	SAFETY END SECTION 18 IN, STORM DRAIN, 6:1 SLOPE	1	EA		
550-4118	FLARED END SECTION 18 IN, SIDE DRAIN	1	EA		
207-0203	FOUND BK FILL MATL, TP II	30	CY		
600-0001	FLOWABLE FILL	2	CY		
603-2181	STN DUMPED RIP RAP, TP 3, 18 IN	163	SY		
603-2024	STN DUMPED RIP RAP, TP 1, 24 IN	52	SY		
603-7000	PLASTIC FILTER FABRIC	215	SY		
611-8050	ADJUST MANHOLE TO GRADE	1	EA		
668-4300	STORM SEWER MANHOLE, TP 1	16	EA		
668-4311	STORM SEWER MANHOLE, TP 3, ADDL DEPTH, CL 1	9	LF		
668-1100	CATCH BASIN, GP 1	2	EA		
668-2100	DROP INLET, GP 1	39	EA		
668-2110	DROP INLET, GP 1, ADDL DEPTH	1	LF		
668-5000	JUNCTION BOX	1	EA		

Bidder: _____

ATTACHMENT TO ADDENDUM 4

Pay Item #	Item Description	Qty.	Unit	Unit Price	Total
999-0600	INFILTRATION TRENCH, STA NO - 224+75	1	LS		
999-0600	INFILTRATION TRENCH, STA NO - 226+50	1	LS		
	Sub Total				
	Erosion Control				
163-0232	TEMPORARY GRASSING	2	AC		
163-0240	MULCH	73	TN		
163-0300	CONSTRUCTION EXIT	2	EA		
163-0503	CONSTRUCT AND REMOVE SILT CONTROL GATE, TP 3	2	EA		
163-0527	CONSTRUCT AND REMOVE RIP RAP CHECK DAMS, STONE PLAIN RIP RAP/SAND BAGS	31	EA		
163-0528	CONSTRUCT AND REMOVE FABRIC CHECK DAM - TYPE C SILT FENCE	2505	LF		
163-0539	CONSTRUCT AND REMOVE RETROFIT-SLOTTED BOARD DAM W/STONE FILTER	6	EA		
163-0541	CONSTRUCT AND REMOVE ROCK FILTER DAMS	6	EA		
163-0550	CONSTRUCT AND REMOVE INLET SEDIMENT TRAP	41	EA		
165-0010	MAINTENANCE OF TEMPORARY SILT FENCE, TP A	4222	LF		
165-0030	MAINTENANCE OF TEMPORARY SILT FENCE, TP C	171	LF		
165-0041	MAINTENANCE OF CHECK DAMS - ALL TYPES	2970	LF		
165-0087	MAINTENANCE OF SILT CONTROL GATE, TP 3	2	EA		
165-0096	MAINTENANCE OF RETROFIT-SLOTTED BOARD DAM W/ STONE FILTER	6	EA		
165-0101	MAINTENANCE OF CONSTRUCTION EXIT	2	EA		
165-0105	MAINTENANCE OF INLET SEDIMENT TRAP	41	EA		
165-0110	MAINTENANCE OF ROCK FILTER DAM	6	EA		
167-1000	WATER QUALITY MONITORING AND SAMPLING	3	EA		
167-1500	WATER QUALITY INSPECTIONS	18	MO		
171-0010	TEMPORARY SILT FENCE, TYPE A	8444	LF		
171-0030	TEMPORARY SILT FENCE, TYPE C	342	LF		
643-8200	BARRIER FENCE (ORANGE), 4 FT	373	LF		
700-9300	SOD	6387	SY		
700-6910	PERMANENT GRASSING	4	AC		
700-7000	AGRICULTURAL LIME	12	TN		
700-8000	FERTILIZER MIXED GRADE	4	TN		
700-8100	FERTILIZER NITROGEN CONTENT	200	LB		
716-2000	EROSION CONTROL MATS, SLOPES	4222	SY		
	Sub Total				
	Cost Estimate (Continued)				
	Signing & Marking				
636-1036	HIGHWAY SIGNS, TP 1 MATL, REFL SHEETING, TP 11	152	SF		
636-2070	GALV STEEL POSTS, TP 7	259	LF		
653-1704	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	468	LF		
653-1804	THERMOPLASTIC SOLID TRAF STRIPE, 8 IN, WHITE	870	LF		
653-6004	THERMOPLASTIC TRAF STRIPING, WHITE	112	SY		
	Sub Total				
	Walls				
500-3201	CLASS B CONCRETE, RETAINING WALL	80	CY		
	Sub Total				

Project Number: 0012624
 Fayette County
 Project Pricing Sheet
 Redwine Road & Starrs Mill School Complex Multi-Use Path

Revised:
 8-28-20
 9-16-20

Bidder: _____

ATTACHMENT TO ADDENDUM 4

Pay Item #	Item Description	Qty.	Unit	Unit Price	Total
<div style="display: flex; justify-content: space-between;"> <div> <p>Project Number: 0012624</p> </div> <div style="text-align: center;"> <p>Fayette County Project Pricing Sheet Redwine Road & Starrs Mill School Complex Multi-Use Path</p> </div> <div> <p>Revised: 8-28-20 9-16-20</p> </div> </div>					
500-3201	CLASS B CONCRETE, RETAINING WALL	111	CY		
	Gravity Wall 2				
500-3201	CLASS B CONCRETE, RETAINING WALL	14	CY		
	Gravity Wall 3				
500-3201	CLASS B CONCRETE, RETAINING WALL	98	CY		
	Gravity Wall 4				
	Utility Relocations and Adjustments				
611-8140	Adjust Water Valve Box to Grade	3	EA		
660-1925	Water Main 8 in	33	LF		
670-1120	Water Main 12 in	56	LF		
660-1925	MJ Gate Valve 8-inch	1	EA		
660-1935	MJ Gate Valve 12-inch	2	EA		
500-3200	Class B Concrete (Thrust Block's)	29	CY		
670-9710	Relocate Exist Fire Hydrant	1	EA		
	Sub Total				
	Landscaping				
009-2000	Allowance for LANDSCAPING and/or IRRIGATION at S/D entrances	5	EA	\$10,200.00	\$51,000.00
	Sub Total				
	Signal				
647-1000	TRAFFIC SIGNAL INSTALLATION NO - PEDESTRIAN HYBRID BEACON	1	LS		
	Sub Total				
	Fayette County Special Allowance				
NA	Allowance for claims or extra work	1	LS	\$90,000.00	\$90,000.00
	Sub Total				
TOTAL PROJECT CONSTRUCTION =					

Project Pricing Sheet revised on 8-28-20 to provide standard allowance for item 009-2000. The Engineer's estimate was averaged across five entrances.
 Project Pricing Sheet revised on 9-16-20 for changes in the Utility Relocation and Adjustment section. Replacement of tapping sleeve & assembly with gate valve (8 and 12 inch).