

August 1, 2022

**Subject: ITB #2135-B: Lakeview Lane Culvert Replacement
Addendum #1**

Gentlemen/Ladies:

Below, please find responses to questions, clarification, or additional information for the above referenced Invitation to Bid. You will need to consider this information when preparing your quote.

- 1. Can we use precast headwalls or do they need to be poured in place?**
Precast headwalls are acceptable. Shop drawing submittals shall be required.

- 2. The note states that one lane of traffic 12' wide will need to be open at all times. This is going to be very hard to do since the road is only 20' wide. Can the road be temporarily closed for hours at a time?**
At least one travel lane shall remain open at all times for citizens and emergency vehicles. A lane narrower than 12-ft., but no less than 10-ft. may be approved based on site conditions, advanced coordination, and prior approval from Fayette County.

- 3. Will the new RCP culvert pipe be installed in the same location as the exiting CMP culvert pipe?**
The new RCP shall be installed in the same location as the existing CMP.
 - a. Also sheets C502 and C503 are blurry and hard to read. Will you edit these pages?**
Sheets C502 and C503 depict GDOT Construction Standards and Details. The most current details are available on the GDOT website:
 - 1001-B Pipe Culvert and Concrete Headwall
 - 1030-D Concrete and Metal Pipe Culvert Sheet 1 of 3
 - 1030-D Concrete and Metal Pipe Culvert Sheet 2 of 3
 - 1030-D Concrete and Metal Pipe Culvert Sheet 3 of 3
 - 1401 Pavement Patching Details

- 4. Can you provide drawing for Rip Rap area?**
The Rip Rap areas shall conform to GDOT details D-55A and D-55B.

- 5. Is fabric required under Rip Rap?**
Yes, the Rip Rap areas shall conform to GDOT details D-55A and D-55B.
- 6. How much pavement is required to be replaced? Is milling required for tie ins?**
Fayette County Typical Road Cross Section is shown on Sheet C-502 (provided in original ITB Exhibit 1 - Plans). The pavement required to be replaced will be based on the depth of the trench by sloping and benching, supporting the sides, or placing a shield between the side excavation and the work area per OSHA standards.
- 7. Is striping required?**
Striping is not required on Lakeview Lane.
- 8. Is compaction test required? Who is responsible?**
Soil density tests shall be performed on roadway fills four feet in height or greater. Compaction tests shall be performed on every other lift (16-24-inches) along the fill section. Compaction tests shall be performed to within 12-inches of the final grade of the subgrade. Fill areas shall be compacted to 95 percent maximum dry density per standard proctor (ASTM D698. AASHTO T99). The compaction of the top 12-inches of subgrade shall be inspected by County staff by a proof roll inspection. As stated in the project specifications, the Contractor's independent third-party qualified representative will be responsible for testing.
- 9. Does storm drain have to be camera 'ed?**
No. Camera/video footage will not be required from the contractor.
- 10. Pg. C-501 note 11 says waterline shall be 7-ft. from back of curb, but it is currently under paving on Sheet C-101. Is waterline to be relocated outside of road?**
The waterline is not under the pavement. The relocated waterline will not be under the pavement. There is flexibility on the distance of the waterline from the edge of pavement for this project.
- 11. If waterline to remain in road as called out on page C-501 note 13, will it be put into casing?**
The waterline is not under the pavement. The relocated waterline will not be under the pavement; therefore, casing is not required.
- 12. To install valve on existing 6-inch line, can water be shut off temporarily or does it require a line stop?**
Water can be shut off temporarily with Fayette County Water System approval. A 48-hour notice to FCWS shall be required.
- 13. Does 2-inch bypass line have to be pressure tested and chlorinated before put into service?**
Bypass needs to be chlorinated and tested for bacteria, but not pressure tested.

14. Are precast headwalls acceptable?

Precast headwalls are acceptable. Shop drawing submittals will be required.

15. Are working hours 7am to 5pm acceptable Monday thru Saturday?

Yes, work is permitted anytime between 7:00am and 7:00pm Monday thru Saturday.

16. Who is responsible to notify residents of utility and roadway interruptions?

The County will notify affected residents of water and roadway interruptions. Per project specification Section 105.06, it shall be the Contractor's responsibility to coordinate a schedule of operations with each utility owner.

Received by (Name): _____ Company _____


Note: If this addendum is not returned to the Fayette County Purchasing Department or if it is returned not signed, responding individuals, companies or other organizations will still be responsible for the requirements of this addendum and the specifications or changes herein.

The opening date for this ITB has not changed. **The opening time and date are 3:00 p.m., Friday, August 5, 2022.** Bids must be received by the Purchasing Department at the address above, Suite 204, at or before the opening date and time.

The deadline for inquiries has passed, so the Purchasing Department will not be able to accept any additional questions after this time.

If you have questions, please contact Natasha Duggan, Contract Administrator at (770) 305-5150, fax (770) 719-5534 or email at nduggan@fayettecountyga.gov.

Sincerely,

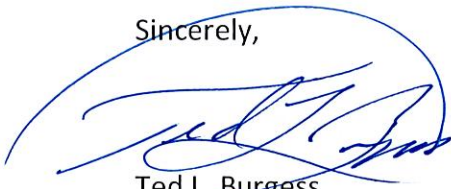

Ted L. Burgess
Director of Purchasing